





Niko Home Control  
4 year warranty

- EN** Digital black, connected control screen, 24 V
- NL** Digital black, geconnecteerd bedieningsscherm, 24 V
- FR** Digital black, écran de commande connecté, 24 V
- DE** Digital black, angeschlossener Bedienbildschirm, 24 V
- DK** Digital black, tilsluttet kontrolskærm, 24 V
- SE** Digital black, uppkoppladekskärn, 24 V
- NO** Digital black, tilkoblet kontrollskjerm, 24 V
- IT** Digital black, schermo di controllo collegato, 24 V
- PL** Digital black, podłączony ekran sterowania, 24 V
- SK** Digital black, pripojenej riadiacej obrazovke, 24 V



## Dimensions

Årmetingen / Dimensions / Abmessungen / Dimensioner / Mått / Dimensioner / Dimenzioni / Wymiary / Rozmery

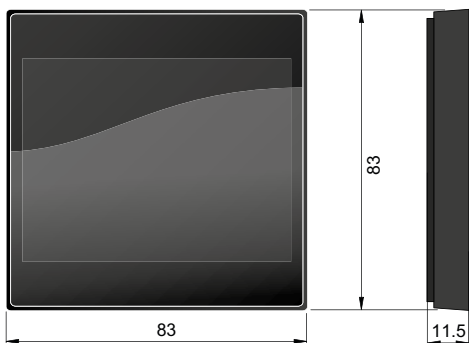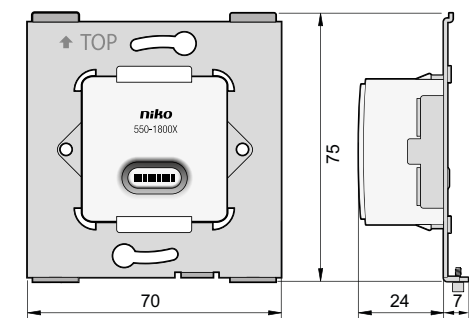


## Wiring

Aansluitschema / Schéma de raccordement / Verdrahtung / Tilslutningsskema  
Kopplingschema / Ledningstilkopling / Cablaggio / Okablowanie / Instalácia

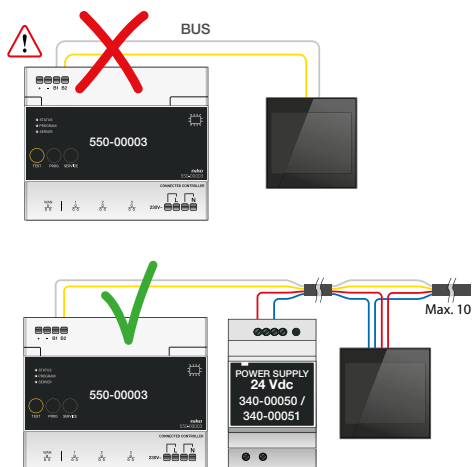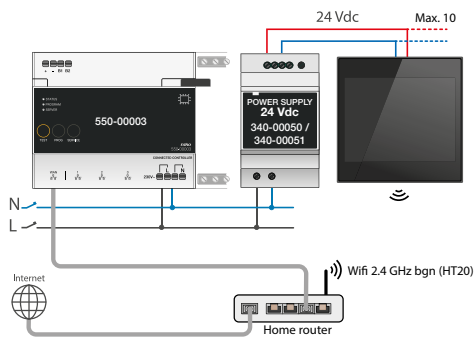

## Installation





Installatie / Installation / Installation / Installation / Installation / Installasjon  
Installazione / Instalacja / Inštalácia

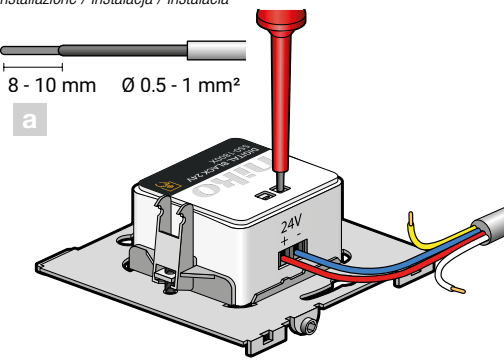

Max. cable length from power supply to the last connected Digital black.  
(maximum 10 Digital blacks per power supply 340-0005X).


Cable Section	Cable type & section			
	UTP	TPVF	SVV	3G1 mm <sup>2</sup>
Section	0.2 mm <sup>2</sup>	0.3 mm <sup>2</sup>	0.5 mm <sup>2</sup>	1 mm <sup>2</sup>
Ø	0.5 mm	0.6 mm	0.8 mm	1.2 mm
1 unit	≤55 m	≤80 m	≤140 m	≤250 m
2 units	≤30 m	≤40 m	≤70 m	≤140 m
3 units	≤20 m	≤25 m	≤45 m	≤90 m
4 units	≤15 m	≤20 m	≤35 m	≤70 m
5 units	≤11 m	≤15 m	≤30 m	≤55 m
6 units	≤10 m	≤12 m	≤25 m	≤45 m
7 units	-	≤11 m	≤20 m	≤40 m
8 units	-	≤10 m	≤15 m	≤35 m
9 units	-	-	≤10 m	≤30 m
10 units	-	-	≤10 m	≤25 m

## option 1

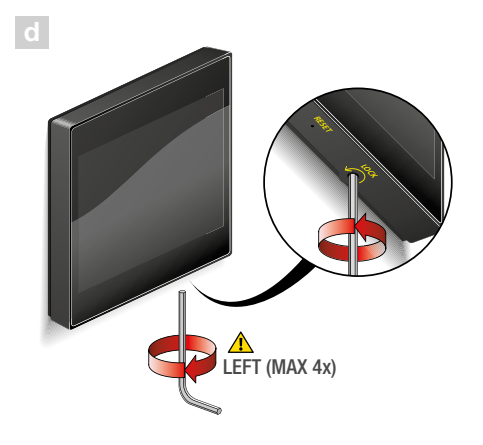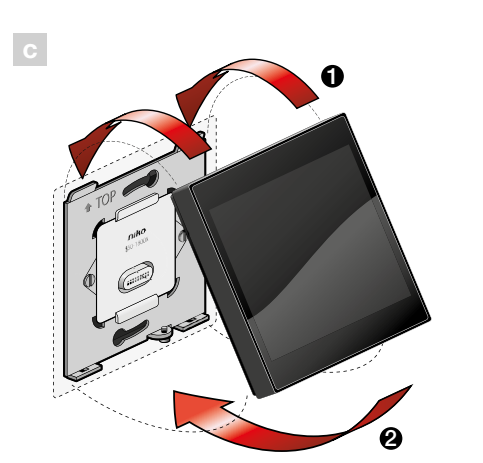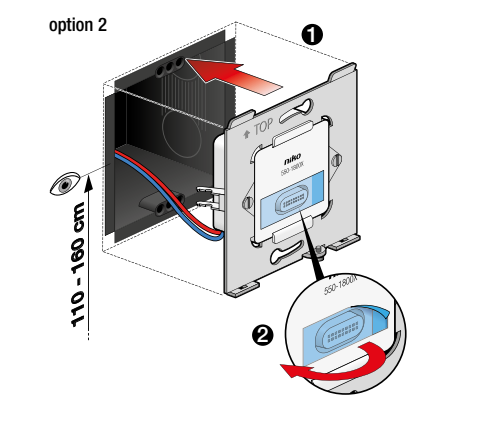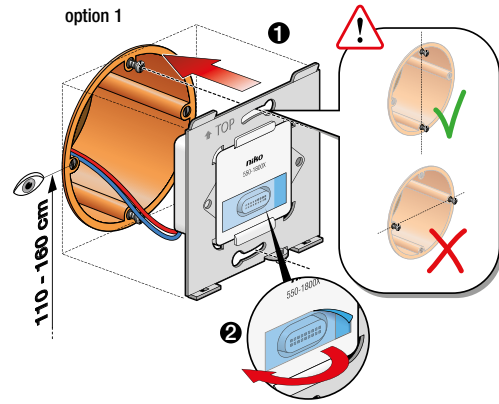

## Thermostat function

Plaatsing / Placement / Platzierung / Anbringung / Placering / Plassering / Sistemazione / Umieszczanie / Umiestnenie

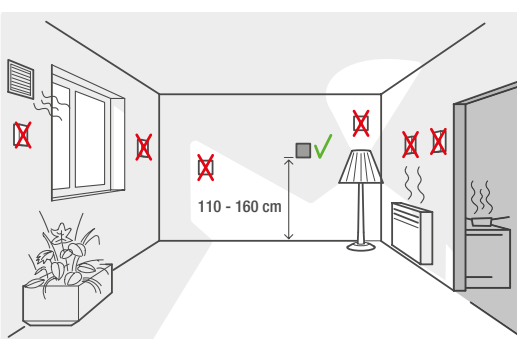

The Digital black may only be used as a thermostat in normal residential conditions. To use the Digital black as a thermostat, your Niko Home Control installation needs to be equipped with the necessary heating or cooling module and connected controller.

Please consult <http://guide.niko.eu> for more information.

## Onboarding

Onboarding / Intégration / Onboarding / Onboarding / Onboarding / Onboarding / Onboarding / Wdrożenie / Onboarding

Before starting: Make sure your Niko Home Control installation has been correctly installed and programmed, is running programming software v. 2.8 or higher and has been registered on <http://mynikohomecontrol.niko.eu>

## Online guide

Online handleiding / Manuel utilisateur en ligne / Online Benutzers-handbuch / Online brugervejledning / Online bruksanvisning / Online brukerhåndbok / Manuale utente online / Podręcznik użytkownika online / Online uživatelská príručica


Consult [guide.niko.eu](http://guide.niko.eu) for more information about the installation, the onboarding and the normal use and the thermostat function.

<http://guide.niko.eu>




## Reboot

Herstarten / Redémarrer / Neustarten / Genstart / Omstarta / Omstart / Riavvio / Restart / Reštart

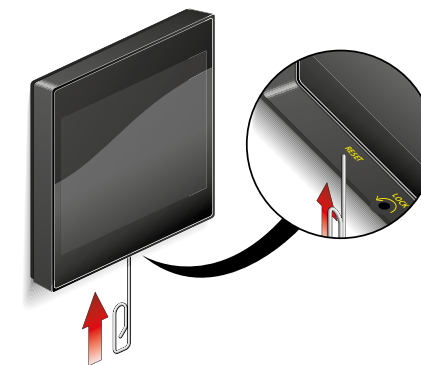

Your Digital black's settings will be preserved  
De instellingen van je Digital black blijven bewaard  
Les paramètres de votre Digital black seront préservés  
Die Einstellungen Ihres Digital black bleiben erhalten  
Dine Digital black indstillinger bliver bevaret  
Din Digital black inställningar kommer att bevaras  
Dine Digital black innstillinger blir bevaret  
Le impostazioni del tuo Digital black verranno mantenute  
Twoje ustawienia Digital black zostaną zachowane  
Nastavenia Digital black budú zachované

## Network setup

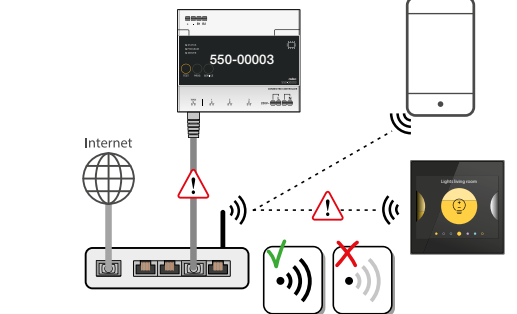

## Download the Niko home app



Please consult <http://guide.niko.eu> for more information.

